




---

**Dimensions**


---

Product dimensions (mm)	Ø85 x 156
Packing dimensions (mm)	270 x 145 x 120
Net weight (g)	627
Gross weight (Kg)	0,8


---



---

**Scheme**


---

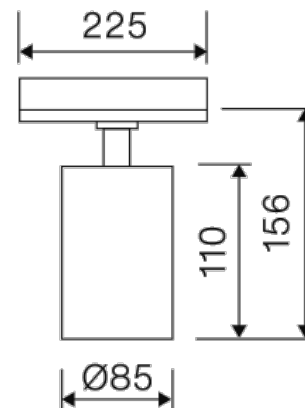**Scheme**







---

**LUXCAN C 1700 15° E 04 930 3F**


---

**DESCRIPTION**

Luxiona spotlight with cylindrical shape from the TROLL family Luxcan C. Luminaire specially designed for general or accent lighting in commercial spaces, show-windows, and other interior spaces. The projector is installed on the TROLL three-phase track system. Spotlight designed with driver built-in the adapter. Body is made of die-cast aluminium and polycarbonate with finishes in Black. Spotlight allows tilting 90° and rotation of 355°. Luminaire has a protection degree vs. environmental of IP20. Spotlight sets in a reflector made of high vacuum aluminised polycarbonate with angle beam of 15°. luminaire built-in a 14 W LED light source with colour temperature of 3000K, colour reproduction over 90% and a colour consistency of 3 SDMC. Luminaire's luminous output is 1493 Lm, with a luminous efficacy of 99,55 Lm/W, and total consumption of 15 W. Luminaire life is (h) 60000 [L80B10], luminaire adds in an Electronic Control Gear built in the adapter fed at: 220...240V 50/60Hz.

Item code	11.1710.1311.04
Product type	IN
Category	Tracklights
Family	Luxcan
Subfamily	Luxcan C
Materials	Spotlight designed with driver built-in the adapter. Body is made of die-cast aluminium and polycarbonate with finishes in Black.
Optical system	Spotlight sets in a reflector made of high vacuum aluminised polycarbonate with angle beam of 15°.
Installation instructions	The projector is installed on the TROLL three-phase track system.
Pictograms	   

---

**Product**


---

Real power (W)	15
Real luminous flux (Lm)	1493
Luminous efficiency (Lm/W)	99,55
Beam angle (°)	15
Life time (h)	60000 (L80B10)
IP	IP20
Electrical class insulation	Class 1
Operating temperature	from -20°C to 35°C
Electrical feeding	220..240V, 50/60Hz
Colour (RAL)	Black(9005)
Energy efficiency class	A+

---



---

**Control gear**


---

Control gear included	Yes
Control gear	Electronic Control Gear
Power Factor	0,98
Flicker Free	Flicker Free

---



---

**Light source**


---

**Light source included**

Light source	Led
Type of LED	CoB
Nominal power (W)	14
Nominal luminous flux (Lm)	1700
Average life time (h)	50000
Colour temperature (K)	3000
Colour consistency (SDCM)	3
CRI	90

---



---

**Photometry**


---

**Photometry**


225mm x 85mm



Semiplanos C

180.0 — 0.0

Flujo 1493.31 lm  
Máximo 6410.06 cd/km  
Posición C=0.000 G=0.000  
Rendimiento 100.00%  
Fecha: 12/25/2018  
Rotométrico



**Accessories**

11.1710.0004.04

**Honeycomb antiglaring accessory for Luxcan C spotlight.**