




#### Dimensions

Product dimensions (mm)	Ø85 x 156
Packing dimensions (mm)	270 x 145 x 120
Net weight (g)	627
Gross weight (Kg)	0,8

#### Scheme

#### Scheme

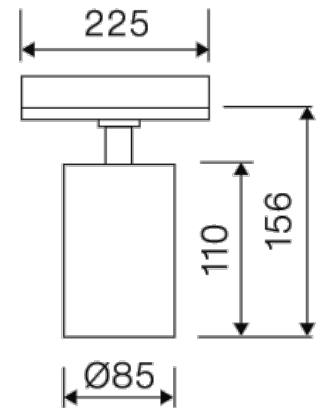

### LUXCAN C 3300 40° E 04 940 3F

#### DESCRIPTION

Luxiona spotlight with cylindrical shape from the TROLL family Luxcan C. Luminaire specially designed for general or accent lighting in commercial spaces, show-windows, and other interior spaces. The projector is installed on the TROLL three-phase track system. Spotlight designed with driver built-in the adapter. Body is made of die-cast aluminium and polycarbonate with finishes in Black. Spotlight allows tilting 90° and rotation of 355°. Luminaire has a protection degree vs. environmental of IP20. Spotlight sets in a reflector made of high vacuum aluminised polycarbonate with angle beam of 40°. luminaire built-in a 25 W LED light source with colour temperature of 4000K, colour reproduction over 90% and a colour consistency of 3 SDMC. Luminaire's luminous output is 2642 Lm, with a luminous efficacy of 97,9 Lm/W, and total consumption of 27 W. Luminaire life is (h) 60000 [L80B10]. luminaire adds in an Electronic Control Gear built in the adapter fed at: 220...240V 50/60Hz.

Item code	11.1710.2441.04
Product type	Indoor Lighting
Category	Tracklights
Family	Luxcan
Subfamily	Luxcan C
Materials	Spotlight designed with driver built-in the adapter. Body is made of die-cast aluminium and polycarbonate with finishes in Black.
Optical system	Spotlight sets in a reflector made of high vacuum aluminised polycarbonate with angle beam of 40°.
Installation instructions	The projector is installed on the TROLL three-phase track system.
Pictograms	

#### Product

Real power (W)	27
Real luminous flux (Lm)	2642
Luminous efficiency (Lm/W)	97,9
Beam angle (°)	40
Life time (h)	60000 (L80B10)
IP	IP20
Electrical class insulation	Class 1
Operating temperature	from -20°C to 35°C
Electrical feeding	220..240V, 50/60Hz
Colour (RAL)	Black(9005)
Energy efficiency class	A+

#### Control gear

Control gear included	Yes
Control gear	Electronic Control Gear
Power Factor	0,98
Flicker Free	Flicker Free

#### Light source

Light source included	
Light source	Led
Type of LED	CoB
Nominal power (W)	25
Nominal luminous flux (Lm)	3300
Average life time (h)	50000
Colour temperature (K)	4000
Colour consistency (SDCM)	3
CRI	90

#### Photometry

**Photometry**


225mm x 85mm



Semiplanos C

180.0 — 0.0

Flujo 2642.11 lm  
Máximo 1981.09 cd/km  
Posición C=0.00 G=0.00  
Rendimiento 100.00%  
Fecha: 07/25/2018  
Rotométrico



**Accessories**

**11.1710.0004.04**

**Honeycomb antiglaring accessory for Luxcan C spotlight.**