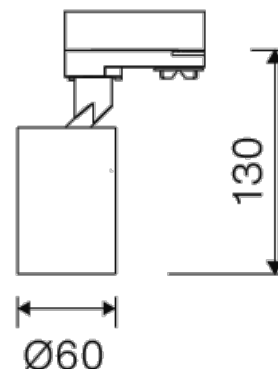


Dimensions

Product dimensions (mm)	ø60 x 100
Packing dimensions (mm)	240 x 75 x 75
Net weight (g)	575
Gross weight (Kg)	0,725

Scheme

Scheme


LUXCAN MINI 85 GU10 3F

DESCRIPTION

Luxiona spotlight with cylindrical shape from the TROLL family Luxcan Mini. Luminaire specially designed for general or accent lighting in commercial spaces, show-windows, and other interior spaces. The projector is installed on the TROLL three-phase track system. Spotlight designed with driver built-in the adapter. Body is made of die-cast aluminium and polycarbonate with finishes in Copper. Spotlight allows tilting 90° and rotation of 355°. Luminaire has a protection degree vs. environmental of IP20. Spotlight has been designed for setting a QPAR16 lamp (lamp not included) luminaire built-in a 15W max. W LED light source with colour temperature of K, colour reproduction over % and a colour consistency of SDMC. Luminaire's luminous output is Lm, with a luminous efficacy of Lm/W, and total consumption of W. Luminaire life is (h) []. luminaire adds in an Electronic Control Gear built in the adapter fed at: 220...240V 50/60Hz.

Item code	11.2027.0001.85
Product type	Indoor Lighting
Category	Tracklights
Family	Luxcan
Subfamily	Luxcan Mini
Materials	Spotlight designed with driver built-in the adapter. Body is made of die-cast aluminium and polycarbonate with finishes in Copper.
Optical system	Spotlight has been designed for setting a QPAR16 lamp (lamp not included)
Installation instructions	The projector is installed on the TROLL three-phase track system.

Product

IP	IP20
Electrical class insulation	Class 1
Operating temperature	from -20°C to 35°C
Electrical feeding	220..240V, 50/60Hz
Colour (RAL)	Copper(no Ral)

Control gear

Control gear included	Yes
Control gear	Electronic Control Gear
Power Factor	0,98
Flicker Free	Flicker Free

Light source

Light source	
Lamp holder	GU10
Nominal power (W)	15W max.