




Dimensions

Product dimensions (mm)	ø85 x 156
Packing dimensions (mm)	270 x 145 x 120
Net weight (g)	627
Gross weight (Kg)	0,8



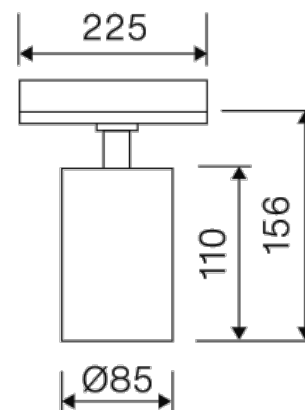

Scheme

Scheme


LUXCAN C 3800 40° E 04 930 3F

DESCRIPTION

Luxiona spotlight with cylindrical shape from the TROLL family Luxcan C. Luminaire specially designed for general or accent lighting in commercial spaces, show-windows, and other interior spaces. The projector is installed on the TROLL three-phase track system. Spotlight designed with driver built-in the adapter. Body is made of die-cast aluminium and polycarbonate with finishes in Black. Spotlight allows tilting 90° and rotation of 355°. Luminaire has a protection degree vs. environmental of IP20. Spotlight sets in a reflector made of high vacuum aluminised polycarbonate with angle beam of 40°. luminaire built-in a 38 W LED light source with colour temperature of 3000K, colour reproduction over 90% and a colour consistency of 3 SDMC. Luminaire's luminous output is 3597 Lm, with a luminous efficacy of 84,65 Lm/W, and total consumption of 42 W. Luminaire life is (h) 60000 [L80B10], luminaire adds in an Electronic Control Gear built in the adapter fed at: 220...240V 50/60Hz.

Item code	11.1710.3341.04
Product type	Indoor Lighting
Category	Tracklights
Family	Luxcan
Subfamily	Luxcan C
Materials	Spotlight designed with driver built-in the adapter. Body is made of die-cast aluminium and polycarbonate with finishes in Black.
Optical system	Spotlight sets in a reflector made of high vacuum aluminised polycarbonate with angle beam of 40°.
Installation instructions	The projector is installed on the TROLL three-phase track system.
Pictograms	   

Product

Real power (W)	42
Real luminous flux (Lm)	3597
Luminous efficiency (Lm/W)	84,65
Beam angle (°)	40
Life time (h)	60000 (L80B10)
IP	IP20
Electrical class insulation	Class 1
Operating temperature	from -20°C to 35°C
Electrical feeding	220..240V, 50/60Hz
Colour (RAL)	Black(9005)
Energy efficiency class	A+

Control gear

Control gear included	Yes
Control gear	Electronic Control Gear
Power Factor	0,98
Flicker Free	Flicker Free

Light source

Light source	Led
Nominal power (W)	38
Nominal luminous flux (Lm)	3800
Average life time (h)	50000
Colour temperature (K)	3000
Colour consistency (SDCM)	3
CRI	90

Photometry

Photometry


225mm x 85mm



Semiplanos C

180.0 — 0.0

Flujo 2887.43 lm
Máximo 1979.67 cd/klm
Posición C=0.00 C=100
Rendimiento 100.00%
Fecha: 08/25/2018
Rotosimétrico



Accessories

11.1710.0004.04

Honeycomb antiglaring accessory for Luxcan C spotlight.